

Highsong LED Tube Lights



Highsong T8/T10/T5 Tube 2/3/4/5 feet

High quality! 2 YEAR WARRANTY !



Factory price!



Highsong

SGS Approved

Contact Person: Johnson Chen (International Marketing Manager)

Shenzhen Hongxing Lighting Co., Ltd

E-mail: highsongled@gmail.com

MSN: chena-in@hotmail.com

Skype/Yahoo: johnsonhighsong

Tel: 86-0755-61163113/61163533/61163373

Hongxing Lighting, your reliable LED lights supplier!

LED Tube T8 T10/T5 are available.



- *Light source: SMD3528/SMD3020
 - *Dimension: 300/600/900/1200/1500/1800(1/2/3ft) X 26/30/15mm (T5/T8/T10)
 - *Input voltage: AC 85V-165V, AC 165V-265V, AC85V-265V (full-range)
 - *Working frequency: 50/60Hz
 - *LED quantity: 120/180/240/300/360/432/480pcs
 - *Luminous flux: 500-2200lm
 - *Power: 8/10/12/15W (equal to 25/45W conventional tube power)
 - *Tube type: transparent clear/stripe clear/frosted
 - *Color temperature: W3000K to 9000K
 - *Operating life: 50,000 to 80,000 hours
 - *Available color: pure white/warm white/cold white
 - *Energy conservation above 80%
 - *Certification: CE/RoHS/FCC
 - *Big carton: 25 pieces/1 carton
 - *Working temperature: -20 to +50 degree Celsius
 - *Lifespan: 50,000 hours
 - *Material: PVC in the front, aluminum in the back (front PVC clear/stripe/frosted optional)
 - *Viewing angle: 120 to 135 degrees
 - *Light decay: 4.5% after 1,000 hours
 - *Remark: any colors are available (red, blue, orange, green, yellow and more)
- Our standard products: 2ft T8, 2ft T10, 4ft T8, 4ft T10.

Features:

- #No UV, No mercury or hazardous materials, environment friendly no flickering, very short start time, saves 60% power consumption comparing with the fluorescent light and long lifespan
- #Ideal replacement to the traditional T8 fluorescent light, great lifespan, and no need of maintenance cost.
- #Low energy consumption, ideal for all energy saving applications
- #No mercury or hazardous materials, environment friendly
- #Electronic ballast can removed when replace traditional ones.

Our main LED tube lights


SMD3528 Tube Series							
Part No.	Color	LED Qty	Input voltage	Power	Luminous	Cover	Dimension
0.6M (2ft) 8W/10W Series							
PW(Pure White 7000+K), CW(Commercial white 5000-6500K), WW(Warm White 3000-4000K)							
HX-T80626P1120-01	PW CW WW	120	85-165V	8W	650-750	Clear	0.6m, Φ26,0.12kg
HX-T80626P1120-02		120	165-265V	8W	600-700	Stripe	0.6m, Φ26,0.12kg
HX-T80626P1120-03		120	85-165V	8W	600-700	frosted	0.6m, Φ26,0.12kg
HX-T80630P1120-05		162	85-165V	10W	950-1050	Clear	0.6m, Φ30,0.2kg
HX-T80626P1120-06		162	165-265V	10W	900-1000	Stripe	0.6m, Φ30,0.2kg
HX-T80626P1120-07		162	85-165V	10W	900-1000	frosted	0.6m, Φ30,0.2kg
0.9M (3ft) 12W/ Series							
HX-T80926P1180-01	PW CW WW	180	100V-140V	12W	950-1050	Clear	0.9m, Φ26,0.18kg
HX-T80926P1180-02		180	165-265V	12W	900-1000	Stripe	0.9m, Φ26,0.18kg
HX-T80926P1180-03		180	100V-140V	12W	900-1000	frosted	0.9m, Φ26,0.18kg
HX-T80930P1180-05		243	100V-140V	15W	1200-1350	Clear	0.9m, Φ30,0.3kg
HX-T80930P1180-06		243	165-265V	15W	1150-1300	Stripe	0.9m, Φ30,0.3kg
HX-T80930P1180-07		243	100V-140V	15W	1150-1300	frosted	0.9m, Φ30,0.3kg
1.2M (4ft) 16W Series							
HX-T81226P1240-01	PW CW WW	240	100V-140V	16W	1300-1450	Clear	1.2m, Φ28,0.3kg
HX-T81226P1240-02		240	200V-240V	16W	1250-1400	Stripe	1.2m, Φ28,0.3kg
HX-T81226P1240-03		240	100V-140V	16W	1250-1400	frosted	1.2m, Φ28,0.3kg
HX-T81230P1324-05		324	100V-140V	20W	1730-1820	Clear	1.2m, Φ30,0.39kg
HX-T81230P1324-06		324	200V-240V	20W	1620-1710	Stripe	1.2m, Φ30,0.39kg
HX-T81226P1240-07		324	100V-140V	20W	1620-1710	frosted	1.2m, Φ30,0.39kg
1.5M (5ft) 20W Series							
HX-T81526P1300-01	PW CW WW	300	100V-140V	20W	1780-2050	Clear	1.5m, Φ26,0.33kg
HX-T81526P1300-02		300	200V-240V	20W	1620-1880	Stripe	1.5m, Φ26,0.33kg
HX-T81530P1300-03		300	100V-140V	20W	1620-1880	frosted	1.5m, Φ26,0.33kg
HX-T81530P1300-05		300	100V-140V	20W	2130-2450	Clear	1.5m, Φ30,0.49kg
HX-T81530P1300-06		300	200V-240V	20W	2137-2250	frosted	1.5m, Φ30,0.49kg

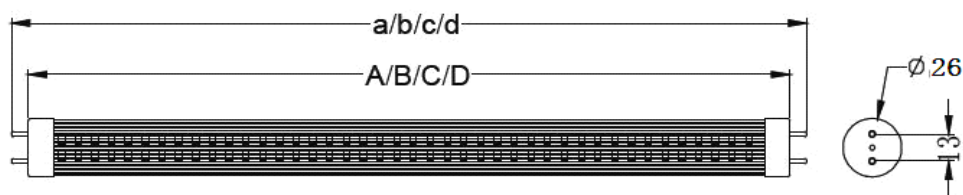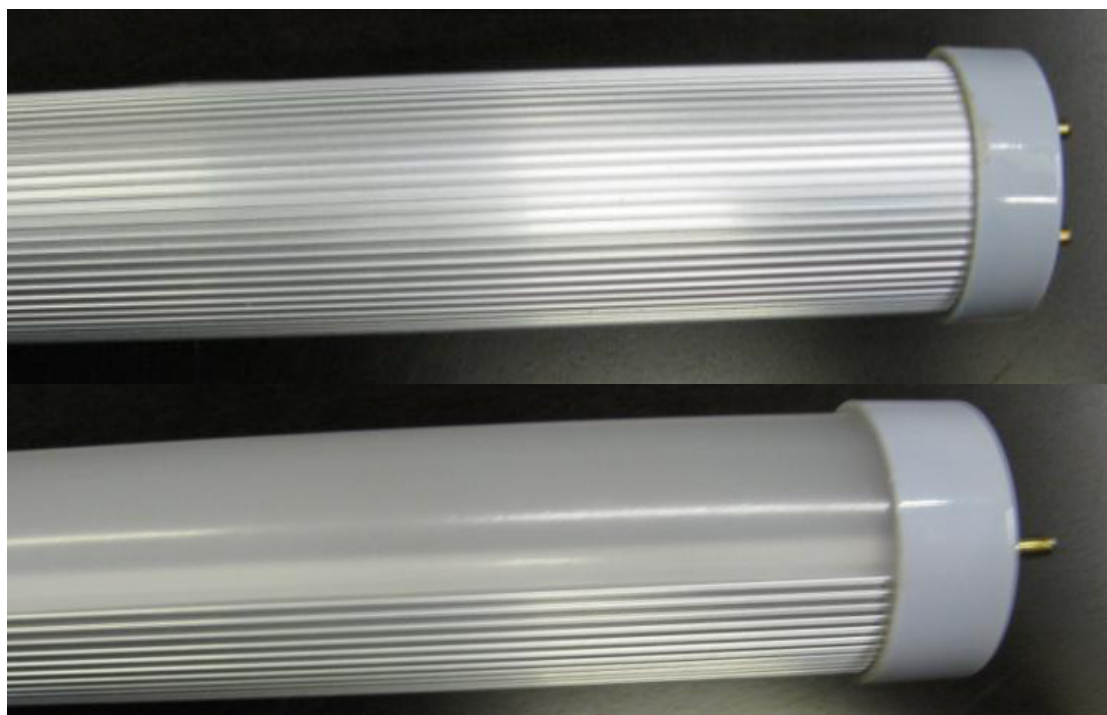

0.6M	A=0.59M	a=0.604M
0.9M	B=0.89M	b=0.91M
1.2M	C=1.2M	c=1.214M
1.5M	D=1.5M	d=1.514m

Highsong T8

Highsong

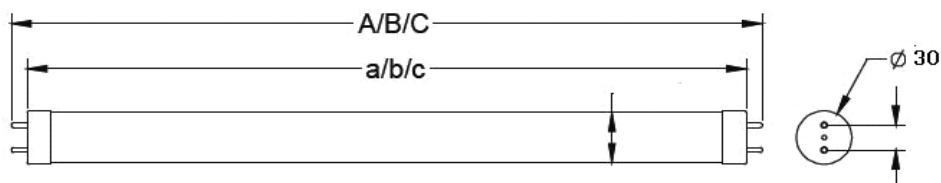

0.6M	A=0.59M	a=0.604M
0.9M	B=0.89M	b=0.91M
1.2M	C=1.2M	c=1.214M
1.5M	D=1.5M	d=1.514m

Highsong T10

T5 series all available.

Application:

- *Ideal replacement of traditional fluorescent tube lights
- *Light source in the advertisement box..
- *School/universities/hospital lighting.
- *Conference/meeting room, show room indoor lighting.
- *Commercial lighting
- *Factories/offices lighting
- *Supermarkets lighting
- *Residential/institution buildings lighting


Highsong



Highsong

Installation

The traditional fluorescent tube (with a ballast)

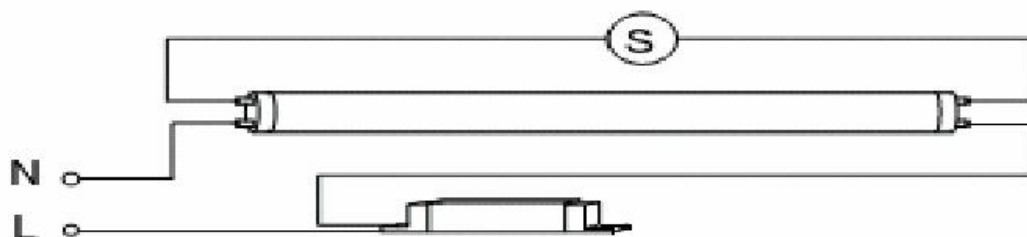

The led fluorescent tube: can directly replace the traditional one with the ballast and start device removed.



Highsong

Why us?

Directly manufacture, competitive price but good quality, and stability after-sale service!

Download our GSG certification in www.highsong333.en.made-in-china.com.


Experienced technical staff Experienced R&D department

Advanced equipment, Large scale production lines Strong production capability

OEM accepted

Unique design, No matter what product and solution you need, just give us email or call. Our dedicated sales and tech support team will glad to help you.

Our Product/Service: LED Fluorescent Lamps, LED Light Bulbs, LED Light Strips, LED Modules, LED Light Bars, LED Spotlights, LED Down Light, LED Floodlight, LED Wall Lamp, LED Controllers and related LED accessories.

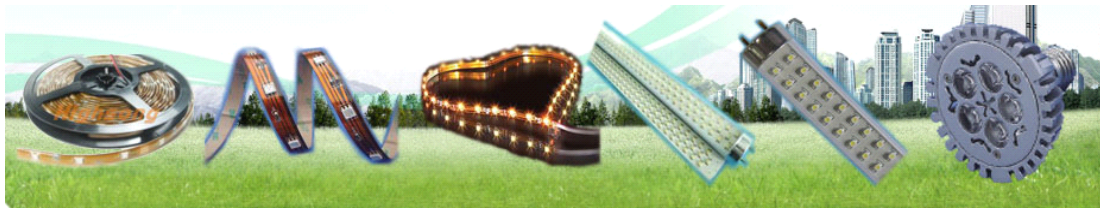

We have engaged in the led lights for many years. and we concentrate in some of the main LED lights, and to make it competitive in the market by scale production. So our products can be very competitive in the same quality rank in any market. So here I strongly recommend you chose from our standard product, for shorter delivery time, and lower price.

Of course, if you have unique requirement, as a factory, we can make the unique order for you!

Why LED lights?

Long life-lifetimes can exceed 100,000 hours, as compared to 1,000 hours for tungsten bulbs, white led:50,000+hours

Robustness -no moving parts, no glass, Flexible and can be fix on accident surface, and small volume. Solid-state, high shock or vibration resistant, free maintenance.

Size- typical package is only 5 mm in diameter, easy to transport. air is available.

Energy efficiency - up to 90% less energy used translates into smaller power supply required, low power supply, safe and jar less.

Non-toxicity -no mercury, No RF interference.

Versatility- available in a variety of colors.

Cool- less heat radiation than HID or incandescent.

Protect our environment is protect our life, we can do more!

More information, please visit: www.highsong.com

<http://highsong333.en.made-in-china.com/>

www.highsong.en.ec21.com

<http://highsong666.cn.alibaba.com>

or just contact us. chena-in@hotmail.com

